
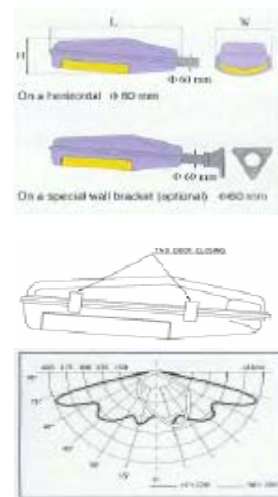





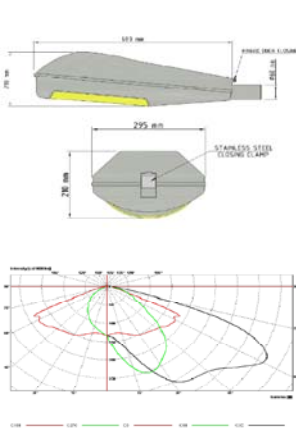





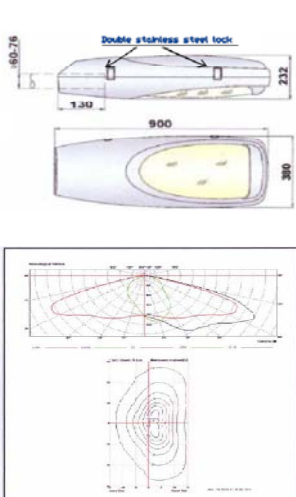







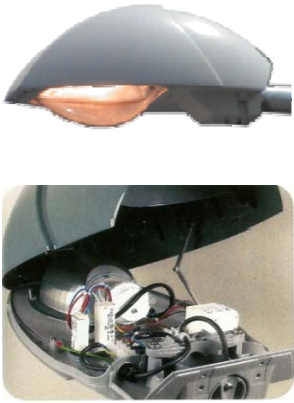
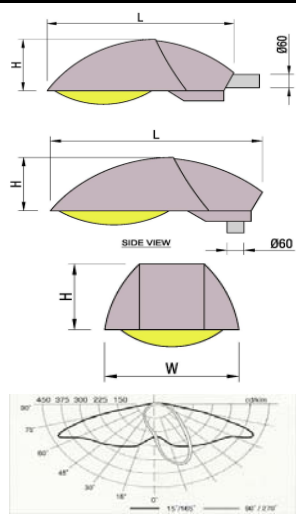


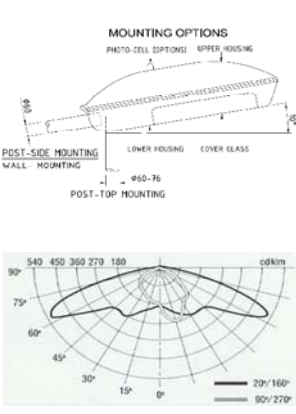

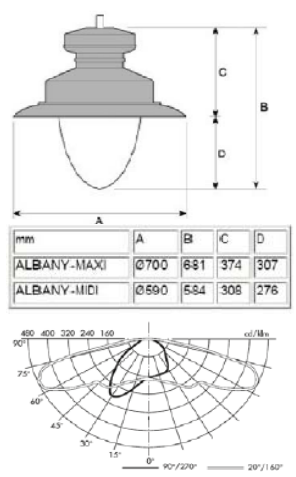

## OUT DOOR LIGHTING FIXTURE

Product Name	Product Picture	Technical Specifications	Photometric Data & Mounting Option	Lamp Type		
				HPS	MV	MH
ONYX 1		<ul style="list-style-type: none"> <li>Aluminum Sealsafe IP66</li> <li>Die-cast aluminum body</li> <li>Consists of a protector in curved tempered glass.</li> <li>Reflector in polished and anodised aluminum.</li> <li>Aluminum Sealsafe optical compartment</li> <li>Support for vertical or T-shaped mounting <math>\phi</math> 60 mm</li> <li>Removable control gear plate</li> <li>Painting : polyester powder coating.</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		70W	-	-
				-	-	125W
				150W	-	-
				250W	250W	250W
				400W	400W	-
DZ25		<ul style="list-style-type: none"> <li>Aluminum Sealsafe IP66</li> <li>Die-cast aluminum body</li> <li>Consists of a protector in curved tempered glass.</li> <li>Reflector in polished and anodised aluminum.</li> <li>Aluminum Sealsafe optical compartment</li> <li>Support for vertical or T-shaped mounting <math>\phi</math> 60 mm</li> <li>Removable control gear plate</li> <li>Painting : polyester powder coating.</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		70W	-	-
				100W	-	-
				150W	-	-
				250W	250W	250W
				400W	400W	400W
IMAGE		<ul style="list-style-type: none"> <li>Sealsafe IP66</li> <li>Body &amp; Crown: Cast aluminum</li> <li>Thermoformed acrylic or hardened glass</li> <li>Reflector in polished and anodised aluminum.</li> <li>Support for vertical or horizontal mounting <math>\phi</math> 60 mm</li> <li>Removable control gear plate</li> <li>Painting : polyester powder</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		70W	-	-
				-	125W	-
				150W	-	150W
				250W	250W	250W
				400W	-	400W

## OUT DOOR LIGHTING FIXTURE

Product Name	Product Picture	Technical Specifications	Photometric Data & Mounting Option	Lamp Type		
				HPS	MV	MH
AJA		<ul style="list-style-type: none"> <li>Aluminum Sealsafe IP66</li> <li>Die-cast aluminum body</li> <li>Consists of a protector in curved tempered glass.</li> <li>Reflector in polished and anodised aluminum.</li> <li>Aluminum Sealsafe optical compartment</li> <li>Removable control gear plate</li> <li>Painting : polyester powder coating.</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		250W	250W	250W
				400W	400W	400W
				600W	600W	600W
						
AJA 1		<ul style="list-style-type: none"> <li>Injection-moulded aluminum hot stove grey enamel painted</li> <li>Consists of a protector in curved tempered glass.</li> <li>Reflector in polished and anodised aluminum.</li> <li>Removable control gear plate</li> <li>Stainless steel closing clamp</li> <li>Heavy duty hinges</li> <li>Tightness : IP65 optical unit</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		70W	-	-
				100W	-	-
				125W	125W	-
				150W	150W	150W
				250W	250W	250W
AJA 2		<ul style="list-style-type: none"> <li>Injection-moulded aluminum hot stove grey enamel painted</li> <li>Clear pattern tempered curved glass diffuser</li> <li>Reflector in high purity aluminum, deep drawn polished and anodised.</li> <li>Hydraulic open cover holder</li> <li>Stainless steel closing clamp</li> <li>Heavy duty hinges</li> <li>Tightness : IP65 optical unit</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		150W	-	150W
				250W	-	250W
				400W	-	400W
				600W	-	600W
						


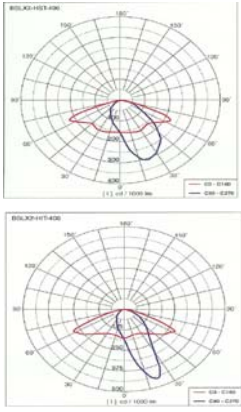
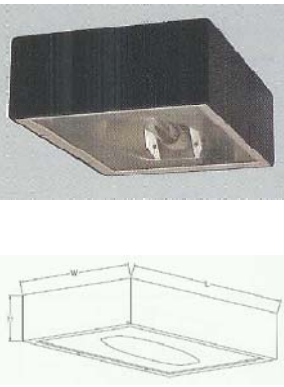
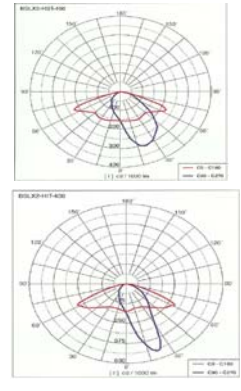
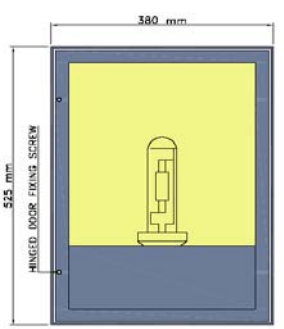
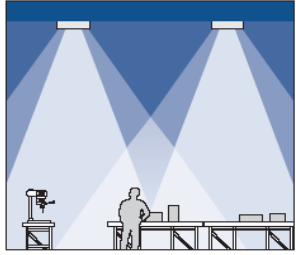

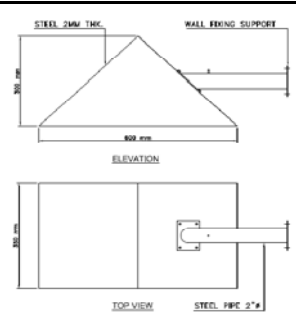
## OUT DOOR LIGHTING FIXTURE

Product Name	Product Picture	Technical Specifications	Photometric Data & Mounting Option	Lamp Type													
				HPS	MV	MH											
LINA		<ul style="list-style-type: none"> <li>Sealsafe IP66</li> <li>Die-cast aluminum body &amp; crown</li> <li>Consists of a protector in curved tempered glass.</li> <li>Reflector in polished and anodised aluminum.</li> <li>Aluminum Sealsafe optical compartment</li> <li>Support for vertical or T-shaped mounting <math>\phi</math> 60 mm</li> <li>Painting : polyester powder coating.</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		<table border="1"> <tr><td>70W</td><td>-</td><td>-</td></tr> <tr><td>100W</td><td>-</td><td>-</td></tr> <tr><td>150W</td><td>-</td><td>-</td></tr> <tr><td>250W</td><td>-</td><td>-</td></tr> </table>	70W	-	-	100W	-	-	150W	-	-	250W	-	-	
	70W	-	-														
100W	-	-															
150W	-	-															
250W	-	-															
SSL-SDL-40		<ul style="list-style-type: none"> <li>Made of two parts die-cast aluminum body.</li> <li>Consists of a protector in curved tempered glass.</li> <li>Reflector in polished and anodised aluminum.</li> <li>Stainless steel closing clamp</li> <li>Heavy duty hinges</li> <li>Tightness : IP65 optical unit</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		<table border="1"> <tr><td>150W</td><td>-</td><td>150W</td></tr> <tr><td>250W</td><td>-</td><td>250W</td></tr> <tr><td>400W</td><td>-</td><td>400W</td></tr> </table>	150W	-	150W	250W	-	250W	400W	-	400W				
	150W	-	150W														
250W	-	250W															
400W	-	400W															
ALBANY		<ul style="list-style-type: none"> <li>Spun aluminum body</li> <li>Coextruded polycarbonate protector</li> <li>Sealsafe® optical assembly (IP66)</li> <li>Disconnectable control gear plate</li> <li>Hinge, 1/4-tum stainless steel</li> <li>screws to open and close the luminaire</li> <li>Suspended mounting</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		<table border="1"> <tr><td>-</td><td>-</td><td>70W</td></tr> <tr><td>-</td><td>125W</td><td>-</td></tr> <tr><td>-</td><td>-</td><td>150W</td></tr> <tr><td>250W</td><td>-</td><td>250W</td></tr> </table>	-	-	70W	-	125W	-	-	-	150W	250W	-	250W	
	-	-	70W														
-	125W	-															
-	-	150W															
250W	-	250W															

## OUT DOOR LIGHTING FIXTURE

Product Name	Product Picture	Technical Specifications	Photometric Data & Mounting Option	Lamp Type		
				HPS	MV	MH
SSL-BELL		<ul style="list-style-type: none"> <li>• Cast aluminum canopy</li> <li>• Spun aluminum with coextruded polycarbonate stabilized against UV-RAYS</li> <li>• optical whites round reflector.</li> <li>• Tightness (IP66), gasket EPDM</li> <li>• Control gear plate</li> <li>• 1/4-tum stainless steel screws to open and close the luminaire</li> <li>• Suspended mounting</li> <li>• Voltage : 220-240V, 50/60Hz.</li> <li>• Electrical insulation : Class I.</li> </ul>		-	-	70W
				-	125W	-
				-	-	150W
				250W	-	250W
SSL-CONE 15		<ul style="list-style-type: none"> <li>• Whole aluminum die-cast body, with high intensity, good anticorrosion performance and concise appearance.</li> <li>• Coextruded polycarbonate protector.</li> <li>• Shade made of PC, with good transparency and high intensity.</li> <li>• The reflector is 3D emulated and designed by computer, with excellent structure and good reflecting effect.</li> <li>• Tightness : IP65 optical unit</li> <li>• Voltage : 220-240V, 50/60Hz.</li> <li>• Electrical insulation : Class I.</li> </ul>		70W	-	70W
				-	-	-
				150W	-	150W
HIGHBAY PZC		<ul style="list-style-type: none"> <li>• Extruded aluminum base, powder coated paint</li> <li>• High purity aluminum reflector, polished and anodised.</li> <li>• 6mm tempered glass for IP65 protection degree.</li> <li>• IP23 (standard), IP65 (with glass)</li> <li>• Suspended mounting</li> <li>• Voltage : 220-240V, 50/60Hz.</li> <li>• Electrical insulation : Class I.</li> </ul>		150W	-	150W
				250W	-	250W
				400W	400W	400W


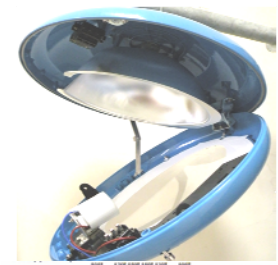
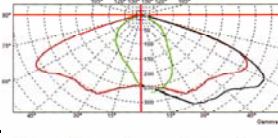


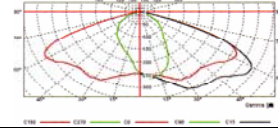


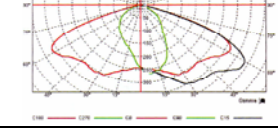


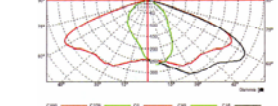
## OUT DOOR LIGHTING FIXTURE

Product Name	Product Picture	Technical Specifications	Photometric Data & Mounting Option	Lamp Type		
				HPS	MV	MH
SHOEBOX SHBX		<ul style="list-style-type: none"> <li>Aluminium body, hot stove black enamel painted.</li> <li>High purity aluminium reflector polished &amp; anodized.</li> <li>6mm tempered glass mounted on a hinged aluminium frame.</li> <li>Tightness IP65</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		50W	50W	50W
				70W	70W	70W
				100W	100W	100W
				125W	125W	125W
				150W	150W	150W
				250W	250W	250W
				400W	400W	400W
LOWBAY BSLX		<ul style="list-style-type: none"> <li>Aluminium body, hot stove black enamel painted.</li> <li>High purity aluminium reflector polished &amp; anodized.</li> <li>6mm tempered glass mounted on a hinged aluminium frame.</li> <li>Tightness IP65</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		50W	50W	50W
				70W	70W	70W
				100W	100W	100W
				125W	125W	125W
				150W	150W	150W
				250W	250W	250W
				400W	400W	400W
SHOEBOX BS1		<ul style="list-style-type: none"> <li>Aluminium body, hot stove black enamel painted.</li> <li>High purity aluminium reflector polished &amp; anodized.</li> <li>6mm tempered glass mounted on a hinged aluminium frame.</li> <li>Tightness IP65</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		250W	-	250W
				400W	-	400W
				1000 W	-	1000 W
TRIANGULAR SHOEBOX TR-SHRX		<ul style="list-style-type: none"> <li>Aluminium body, hot stove black enamel painted.</li> <li>High purity aluminium reflector polished &amp; anodized.</li> <li>6mm tempered glass mounted on a hinged aluminium frame.</li> <li>Tightness IP65</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		250W	250W	250W
				400W	400W	400W

## OUT DOOR LIGHTING FIXTURE

Product Name	Product Picture	Technical Specifications	Photometric Data & Mounting Option	Lamp Type		
				HPS	MV	MH
FV3		<ul style="list-style-type: none"> <li>• Anodized extruded aluminum body</li> <li>• Aluminium, hot stove gray enamel painted.</li> <li>• High purity aluminium reflector polished &amp; anodized.</li> <li>• 6mm tempered glass mounted on a hinged aluminium frame.</li> <li>• Mounted on a hinged aluminium frame.</li> <li>• Tightness IP65</li> <li>• Voltage : 220-240V, 50/60Hz.</li> <li>• Electrical insulation : Class I.</li> </ul>		Lamp	1x18 W	2x18 W
				Lamp	1x36 W	2x36 W
				Lamp	1x58 W	2x58 W
				70W	70W	70W
				150W	150W	150W
				250W	250W	250W
				400W	400W	400W
FV2		<ul style="list-style-type: none"> <li>• Anodized extruded aluminum body</li> <li>• Aluminium, hot stove gray enamel painted.</li> <li>• High purity aluminium reflector polished and anodized.</li> <li>• 6mm tempered glass mounted on a hinged aluminium frame.</li> <li>• Mounted on a hinged aluminium frame.</li> <li>• Tightness IP65</li> <li>• Voltage : 220-240V, 50/60Hz.</li> <li>• Electrical insulation : Class I.</li> </ul>		Lamp	1x18 W	2x18 W
				Lamp	1x36 W	2x36 W
				Lamp	1x58 W	2x58 W
				70W	70W	70W
				150W	150W	150W
				250W	250W	250W
				400W	400W	400W
FR1		<ul style="list-style-type: none"> <li>• Anodized extruded aluminum body</li> <li>• Aluminium, hot stove gray enamel painted.</li> <li>• High purity aluminium reflector polished &amp; anodized.</li> <li>• 6mm tempered frosted glass.</li> <li>• Sheet steel or Extruded aluminum fixing brackets.</li> <li>• Tightness IP65</li> <li>• Voltage : 220-240V, 50/60Hz.</li> <li>• Electrical insulation : Class I.</li> </ul>		Lamp	18W	-
				Lamp	36W	-
				Lamp	58W	-
				TCL	18W	24W
				TCL	36W	58W
				TCD	10W	13W
				TCD	18W	26W

## OUT DOOR LIGHTING FIXTURE

Product Name	Product Picture	Technical Specifications	Photometric Data & Mounting Option	Lamp Type		
				HPS	MV	MH
MINI IMAGE		<ul style="list-style-type: none"> <li>Die-cast aluminum body</li> <li>High clear tempered 5mm curved toughened glass.</li> <li>High purity aluminium reflector polished &amp; anodised</li> <li>Tightness : IP65 optical unit</li> <li>Painting : polyester powder coating.</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>	 	70W	-	70W
				150W	-	150W
Suspending Mounting Type				250W	-	250W
MINI IMAGE		<ul style="list-style-type: none"> <li>Die-cast aluminum body</li> <li>High clear tempered 5mm curved toughened glass.</li> <li>High purity aluminium reflector polished &amp; anodised</li> <li>Tightness : IP65 optical unit</li> <li>Painting : polyester powder coating.</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>	 	150W	-	150W
				250W	-	250W
Lateral Mounting Type				400W	-	400W
MINI IMAGE		<ul style="list-style-type: none"> <li>Die-cast aluminum body</li> <li>High clear tempered 5mm curved toughened glass.</li> <li>High purity aluminium reflector polished &amp; anodised</li> <li>Tightness : IP65 optical unit</li> <li>Painting : polyester powder coating.</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>	 	150W	-	150W
				250W	-	250W
Bracket Adjustable Type				400W	-	400W
MINI IMAGE		<ul style="list-style-type: none"> <li>Die-cast aluminum body</li> <li>High clear tempered 5mm curved toughened glass.</li> <li>High purity aluminium reflector polished &amp; anodised</li> <li>Tightness : IP65 optical unit</li> <li>Painting : polyester powder coating.</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>	 	150W	-	150W
				250W	-	250W
Lateral Mounting Type				400W	-	400W

## OUT DOOR LIGHTING FIXTURE


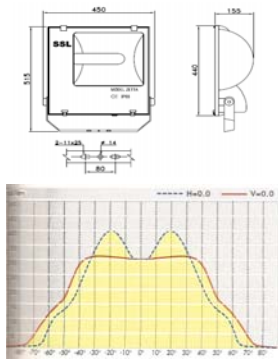

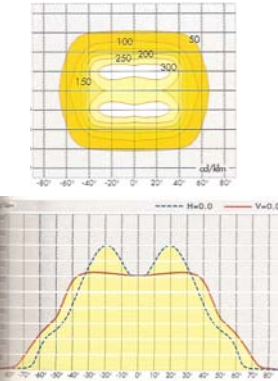

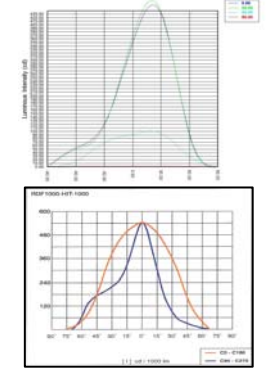

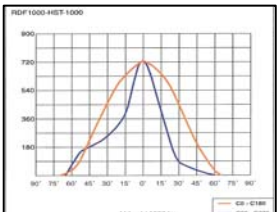
Product Name	Product Picture	Technical Specifications	Photometric Data & Mounting Option	Lamp Type		
				HPS	MV	MH
WALL MOUNTED MEGA-1		<ul style="list-style-type: none"> <li>Cast-aluminium body, hot stove black enamel painted.</li> <li>6mm tempered glass</li> <li>High purity aluminium reflector polished &amp; anodized.</li> <li>Tightness IP65</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		50W	-	50W
	70W			80W	70W	
				100W	-	100W
				-	125W	-
				150W	-	150W
CEILING SURFACE MEGA-2		<ul style="list-style-type: none"> <li>Cast-aluminium body, hot stove black enamel painted.</li> <li>High purity aluminium reflector polished &amp; anodized.</li> <li>Vandal resistant, prismatic, polycarbonate, refractor.</li> <li>Tightness IP65</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		50W	-	50W
	70W			80W	70W	
				100W	-	100W
				-	125W	-
				150W	-	150W
WALL / CEILING OVAL PLAF-1		<ul style="list-style-type: none"> <li>Cast-aluminium body with protective grid</li> <li>Diffuser : Prismatic glass diffuser / weatherproof seal.</li> <li>6mm tempered glass mounted on a hinged aluminium frame.</li> <li>Tightness IP54</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		A60	TC-T	TC-D
	60W			2x18 W	2x26 W	
				100W	-	-
BULKHEAD LUMINAIRE SHCK		<ul style="list-style-type: none"> <li>Cast-aluminium body with protective grid</li> <li>Diffuser : Prismatic glass diffuser / weatherproof seal.</li> <li>6mm tempered glass mounted on a hinged aluminium frame.</li> <li>Tightness IP65</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		A60	TC-T	TC-D
	60W			2x9W	1x26 W	
				100W	-	-
				150W	-	-



## OUT DOOR LIGHTING FIXTURE

Product Name	Product Picture	Technical Specifications	Photometric Data & Mounting Option	Lamp Type		
				HPS	MV	MH
<p>RECESSED DOWNLIGHT</p> <p>DLRS</p>		<ul style="list-style-type: none"> <li>Cast-aluminium body, hot stove black enamel painted.</li> <li>6mm tempered glass for IP65 protection degree.</li> <li>High purity aluminium reflector polished &amp; anodized.</li> <li>Tightness IP65</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		GLS	150W	-
				HIT	70W	-
				HIT	150W	-
<p>SURFACE DOWNLIGHT</p> <p>DLSX</p>		<ul style="list-style-type: none"> <li>Aluminium body, hot stove black enamel painted.</li> <li>High purity aluminium reflector polished &amp; anodized.</li> <li>6mm tempered glass for IP65 protection degree.</li> <li>Tightness IP65</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		GLS	150W	-
				TCD	13/26 W	18W
				Lamp	58W	-
				TCL	18W	24W
				TCL	36W	58W
				TCD	10W	13W
				TCD	18W	26W
<p>WALL MOUNTED</p> <p>DLWPX</p>		<ul style="list-style-type: none"> <li>Aluminium body, hot stove black enamel painted.</li> <li>High purity aluminium reflector polished &amp; anodized.</li> <li>6mm tempered glass for IP65 protection degree.</li> <li>Tightness IP54</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		1x18W TCD		
				2x18W TCD		
				-	70W	-
				-	205W	-
				18W TCD	G 24C-2	DLWPX
				18 W	1200 lm	
<p>wall bracket</p> <p>Model 5000</p>		<ul style="list-style-type: none"> <li>Aluminium body.</li> <li>Clear tempered glass</li> <li>Ceiling surface/Pendant mounting</li> <li>Weather proof - IP54</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		QT-DE-12 - 150W		
				QT-DE-12 - 200W		
				TC-D - 18W		

## OUT DOOR LIGHTING FIXTURE

Product Name	Product Picture	Technical Specifications	Photometric Data & Mounting Option	Lamp Type		
				HPS	MV	MH
FLOOD-LIGHT SSL-ZETA		<ul style="list-style-type: none"> <li>Full die-cast aluminum, hot stove black enamel painted.</li> <li>High purity aluminium reflector polished &amp; anodized.</li> <li>5mm tempered glass high temperature resistant.</li> <li>Tightness IP65</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		125W	-	125W
FLOOD-LIGHT ARCLUCE		<ul style="list-style-type: none"> <li>Die-cast aluminum body with wide cooling fins.</li> <li>High purity aluminium reflector polished &amp; anodized.</li> <li>Thermal shock resistant tempered glass diffuser.</li> <li>Tightness IP66 (*)</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		150W	-	150W
FLOOD-LIGHT SSL-ZETA-1000		<ul style="list-style-type: none"> <li>Full die-cast aluminum, hot stove black enamel painted.</li> <li>High purity aluminium reflector polished &amp; anodized.</li> <li>5mm tempered glass high temperature resistant.</li> <li>Closing clamps of aluminium alloy of high strength</li> <li>Tightness IP65 (*)</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		1000W	-	1000W
FLOOD-LIGHT SSL-ZETA-1500		<ul style="list-style-type: none"> <li>Full die-cast aluminum, hot stove black enamel painted.</li> <li>High purity aluminium reflector polished &amp; anodized.</li> <li>5mm tempered glass high temperature resistant.</li> <li>Closing clamps of aluminium alloy of high strength</li> <li>Tightness IP65 (*)</li> <li>Voltage : 220-240V, 50/60Hz.</li> <li>Electrical insulation : Class I.</li> </ul>		1500W	-	1500W