






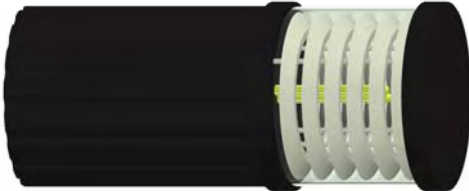


<p>Model : BL-450</p>  <p>Size : Ø200 x 450 mm Height</p> <p>Model : BL-500</p>  <p>Size : Ø150 x 500 mm Height</p>	<p>Model : BL-1000</p>  <p>Size : Ø200 x 800 To 1000 mm H</p>	<p>Model : BL-H800</p>  <p>Size : Ø150 x 800 To 1000 mm H</p>	<p>Model : BL-V800</p>  <p>Size : Ø150 x 800 To 1000 mm H</p>	<p>Model : BL-01</p>  <p>Size : Ø130 x 800 To 1000 mm H</p>	<p>Model : BL-02</p>  <p>Size : 200 x 800 To 1000 mm H</p>	<p>Model : BL-03</p>  <p>Size : 140 x 800 To 1000 mm H</p>
--	--	--	---	--	---	---

A range of bollards with rationally symmetrical light distribution for footpaths,entrances gardens, parks and driveways.

- Construction:**
- Body : Aluminum, hot stove black powder coating painted.
 - Reflector : High purity aluminum reflector. polished and anodized
 - Diffuser : Acrylic diffuser OR white safety glass.

- Characteristics:**
- Tighthess : IP54(*)
 - Electrical insulation : Class I.
 - Voltage : 220-240 V, 50/60 Hz.
 - High power factor
- (*) : In line with standard EN 60-598.

- Lamps :**
- Fluorescent lamp
 - 1x18w - 1x26w TC-D Lamp
 - 70w OR 80w MV
 - 50w OR 70w H.P.S
 - Electronic OR Normal ballast

- Options :**
- Other color finishes.
 - Stone body.